

# Smart Relay



External Bluetooth® (max 3 meters)

## CONNECTED ACTUATOR WITH EXTERNAL BLUETOOTH®



### Make your access points smart

The Smart Relay allows to open electric locks, motorized gate or any electrical actuator which can be activated closing a contact.


### Concealed installation

The Smart Relay device can have an integrated or external Bluetooth antenna, in order to install the device even in unconventional installation spaces: the antenna can be installed in another point and connected to the device.

### Product features

- REX (REquest to eXit) is an Opto-insulated input to open the relay with a button distant up to 100 meters.
- The OUTPUT relay is a signal relay (1A) and can be also configured as NO (default) or NC by a jumper under the cover enclosure. It can be configured with the Argo App for different functions.
- Memorize up to 300 users credentials
- Records the last 1000 events
- Block the Standard Users allowing access only to VIP users
- Programming and software updates by Argo app on iOS and Android devices

# Smart Relay External Bluetooth® (max 3 meters)

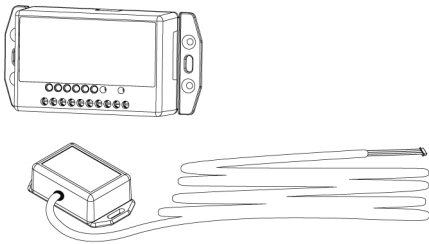

## DIMENSIONS

Smart Relay's dimensions:

- Width: 109mm
- Height: 53mm
- Depth: 26 mm

Bluetooth® Antenna's dimensions:

- Width: 65mm
- Height: 35mm
- Depth: 15mm

cod. **5E065502**

## ACCESS CREDENTIALS

- Smartphone
- Apple Watch

## COMMUNICATION INTERFACE

- Bluetooth® Low Energy 5.1

## Technical features

### FIRMWARE

ARGO

### RELEASE

2.0

### POWER UNIT

10÷30 Vdc (2W) 12÷24 Vac (4VA)

### MOUNTING

- Wall mounted
- Flush mounted
- DIN Rail 35 mounted

### ENVIRONMENTAL FEATURES

- H.R. max. 95% without condensing

### WORKING TEMPERATURE

-25°C ÷ +70°C

### STORAGE TEMPERATURE

-25°C ÷ +70°C

### PACKAGE

1 Smart Relay, 1 Plastic pin to setup Programming Mode, 1 DIN rail mounting clip with screws, 1 Bluetooth® remote module with 3 meters cable, 1 Installation guide (EN/IT)

## Compatibility with ISEO applications

ARGO	LUCKEY	LSA	V364
•	•	-	-