

# V364 Relay

External Bluetooth® (max 3 meters)



## CONNECTED ACTUATOR WITH EXTERNAL BLUETOOTH®



Make your access points smart


Relay allows to open electric locks, motorized gate or any electrical actuator which can be activated closing a contact.

Concealed installation

Relay device can have an integrated or external Bluetooth antenna, in order to install the device even in unconventional installation spaces: the antenna can be installed in another point and connected to the device.

## Product features

- Allows to open electric locks, motorized gate or any electrical actuator which can be activated closing a contact.
- REX (REquest to eXit) is and Opto-insulated input to open the relay with a button distant up to 100 meters.
- The OUTPUT relay is a signal relay (1A) and can be also configured as NO (default) or NC by a jumper under the cover enclosure. It can be configured for different functions.
- Real Time Clock/Calendar
- Software upgradeable on-site via Bluetooth® phone (Stand Alone)

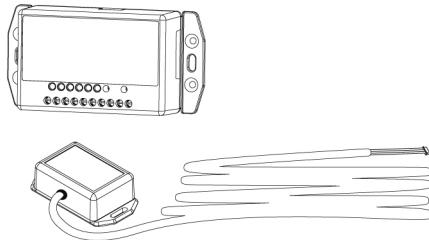

## DIMENSIONS

Smart Relay's dimensions:

- Width: 109mm
- Height: 53mm
- Depth: 26 mm

Bluetooth® Antenna's dimensions:

- Width: 65mm
- Height: 35mm
- Depth: 15mm

## MATERIAL

 Technopolymer

## COLOUR

 Black

cod. **5E066502**

## Technical features

### FIRMWARE

1RIS

### RELEASE

2.0

### POWER UNIT

10÷30 Vdc (2W) 12÷24 Vac (4VA)

### HARDWARE SPECIFICATIONS

2 INPUTS: REX (Request to Exit = opening command) and  
configurable INPUT

2 OUTPUTS: RELAY 5 A and Signal Relay 1 A Configurable

### MOUNTING

- Wall mounted
- DIN Rail 35 mounted

### WORKING TEMPERATURE

-25°C ÷ +70°C

### STORAGE TEMPERATURE

-25°C ÷ +70°C

### PACKAGE

1 Relay, 1 Plastic pin to setup Programming Mode, 1 DIN rail  
mounting clip with screws, 1 Bluetooth® remote module  
with 3 meters cable, 1 Installation guide (EN/IT)

## Compatibility with ISEO applications

ARGO	LUCKY	LSA	V364
-	•	•	•