

V364 Relay

External Bluetooth® (max 3 meters)



CONNECTED ACTUATOR WITH EXTERNAL BLUETOOTH®



Make your access points smart

Relay allows to open electric locks, motorized gate or any electrical actuator which can be activated closing a contact.


Concealed installation

Relay device can have an integrated or external Bluetooth antenna, in order to install the device even in unconventional installation spaces: the antenna can be installed in another point and connected to the device.

Product features

- Allows to open electric locks, motorized gate or any electrical actuator which can be activated closing a contact.
- REX (REquest to eXit) is an Opto-insulated input to open the relay with a button distant up to 100 meters.
- The OUTPUT relay is a signal relay (1A) and can be also configured as NO (default) or NC by a jumper under the cover enclosure. It can be configured for different functions.
- Real Time Clock/Calendar
- Software upgradeable on-site via Bluetooth® phone (Stand Alone)

V364 Relay External Bluetooth® (max 3 meters)

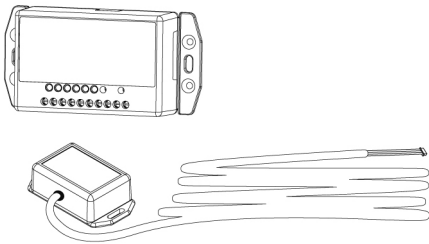

DIMENSIONS

Smart Relay's dimensions:

- Width: 109mm
- Height: 53mm
- Depth: 26 mm

Bluetooth® Antenna's dimensions:

- Width: 65mm
- Height: 35mm
- Depth: 15mm

MATERIAL

Technopolymer

COLOUR

Black

cod. **5E066502**

Technical features

FIRMWARE

1RIS

RELEASE

2.0

POWER UNIT

10÷30 Vdc (2W) 12÷24 Vac (4VA)

HARDWARE SPECIFICATIONS

2 INPUTS: REX (Request to Exit = opening command) and configurable INPUT

2 OUTPUTS: RELAY 5 A and Signal Relay 1 A Configurable

MOUNTING

- Wall mounted
- DIN Rail 35 mounted

WORKING TEMPERATURE

-25°C ÷ +70°C

STORAGE TEMPERATURE

-25°C ÷ +70°C

PACKAGE

1 Relay, 1 Plastic pin to setup Programming Mode, 1 DIN rail mounting clip with screws, 1 Bluetooth® remote module with 3 meters cable, 1 Installation guide (EN/IT)

Compatibility with ISEO applications

| ARGO | LUCKEY | LSA | V364 |
|------|--------|-----|------|
| - | • | • | • |