

ELECTRONIC RFID/BLUETOOTH® TRIM SET FOR PANIC DEVICES



Make your door Smart

The flexibility and simplicity of installation make Aries the ideal solution for access control of residential environments and public places (shopping centres, industries, public and private offices, schools and universities, hospitals and retirement homes, residences and hotels, etc.).

For many applications

ARIES electronic trim set can be fit on most doors. It is conceived to be used also with the majority of mechanical locks, for the utmost installation flexibility. The battery operation and cableless technology makes ARIES the perfect solution for access management, ensuring utmost flexibility and low installation costs both on new and existing doors.

Product features

- Handle movement detection.
- Emergency mechanical key detection.
- Privacy signal.
- Wake up by RFID card detection or phone (patented)
- Battery-operated device with charge status detection
- Low energy consumption device
- Real Time Clock/Calendar
- Anti check back function
- Light and acoustic signals
- Real Time Clock/Calendar
- Software upgradeable on-site via Bluetooth® phone (Stand Alone)
- Four-eye principle (two valid credentials must be presented in sequence to open the lock)

Product options

OVERRIDE CYLINDER HOLE EXTERNAL SIDE

To choose if a mechanical emergency cylinder is used. The mechanical cylinder is still accessible without cylinder hole, by turning the plate.

IP RATING


For internal (IP54) or external (IP55) usage

EMERGENCY OVERRIDE CYLINDER

High Security Iseo R90 Factory Monoprofile. Up to 3 mechanical recordings. Usage detected by electronics. KA on the same installation.

EXTERNAL EMERGENCY POWER SUPPLY

For installations with no override cylinder. Connector under external cover plate. Standard 9V battery usage.

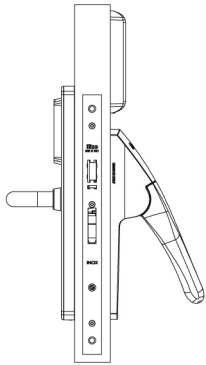

DIMENSIONS

- Plate width: 38 mm;
- Plate length: 294 mm;
- Plate thickness: 17 mm;
- Handle length: 131 mm from plate center;

WEIGHT

1530 g

FINISH

Stainless

cod. **00E1xxx1522**

ACCESS CREDENTIALS

- Badge
- Keyfob
- Bracelet
- Smartphone
- Apple Watch

COMMUNICATION INTERFACE

- RFID ISO14443B/MIFARE ISO14443A
- Bluetooth® Low Energy 5.1

CERTIFICATIONS

- EN 179 certification available in combination with specific locks
- EN 1125 certification available in combination with specific panic devices and locks

Technical features

FIRMWARE

1RIS

RELEASE

2.0

POWER UNIT

2 lithium batteries 3.6V type AA

ESTIMATED BATTERY LIFE

Up to 2 years, up to 20.000 opening. The figure is dependent on the mode and environment of use and the options activated.

ALERTS

- LEDs: 1 Green, 1 Red
- Multi-frequency buzzer

PRODUCT COMPATIBILITY

Can be fit on any door (wooden, aluminium, metal, PVC and

so on).

Door thickness 40 - 85 mm (with standard accessories), 85 - 120 mm (with special accessories).

Suitable for use fire/smoke resisting door assemblies.

7, 8 or 9 (*) mm handle follower. Center distance follower/cylinder 70, 72, 85, 88 and 92 mm.

Backset: 25mm minimum, if using nylon underplate to cover holes on door backset minimum 40mm. European profile cylinder hole.

Latchbolt only or automatic deadbolt function.

Max handle rotation angle 40°.

(*) with adaptor

MOUNTING

- On door

ENVIRONMENTAL FEATURES

- IP55
- IP54

WORKING TEMPERATURE

-20°C ÷ +60°C

STORAGE TEMPERATURE

-25°C ÷ +75°C

PACKAGE

1 trim, 1 battery holder, 2 batteries, 2 mm hex key, instruction manual. NOTE: Handle follower and fixing

screws set, adaptes kit plate, mechanical override cylinder and mechanical lock not included.

ACCESSORIES (NOT INCLUDED)

Handle follower and screws set (mandatory)

Override cylinder

Override keys set

Underplate

Lock

Adapter plate kit for panic devices installation

Compatibility with ISEO applications

ARGO	LUCKEY	LSA	V364
-	•	•	•